

STW 1st Cut



□ USES


- Landscape
- Lawns
- Playgrounds
- Traffic Medians
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

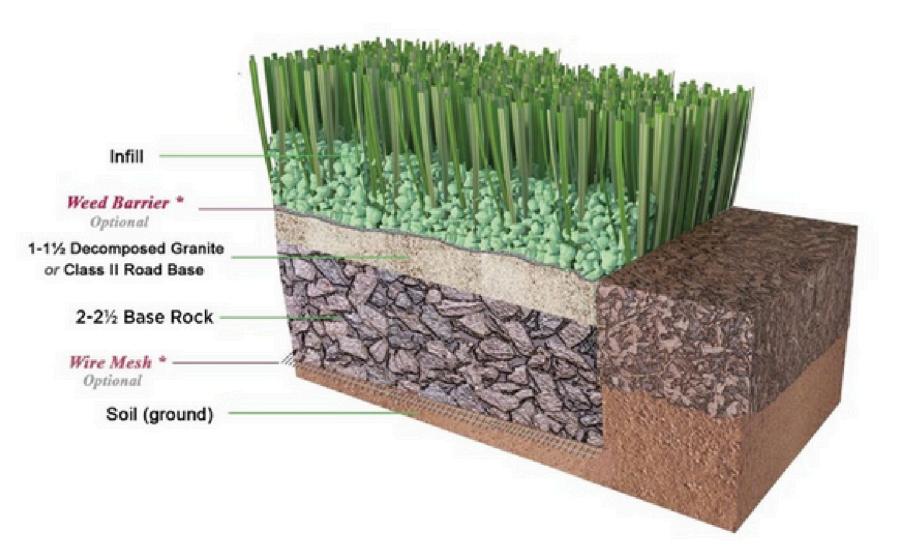

U-SHAPE BLADE



SPECIFICATIONS

Pile Height: 1.5" Turf Gauge: 3/8" Face Weight: 72 oz./yd2 Backing Weight: 27 oz./yd2 Total Weight: **98 oz./yd2** Stitch Rate: **18.5/10cm** Stitches/M2:

19425 Material/Dtex: PE + PP10000 Color: Field

and Apple Face Fiber With Green and

Tan Thatch

Brown and Green Thatching

Type Of Fiber: PE Monofilament and PP Curled

As Thatch

Infill Amount: 1.5 lb./psf.

Primary Backing: Premium AST Backing.

Tuft Bind: 13+ lb/force (ASTM D1335)

Blade Type: U Shape Blade

Permeability: 95 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >300 lb./force (ASTM D5034)

Roll Width: 15 ft Roll Length: 100 ft

Sq. Ft. Per Roll: **1500**

Total Roll Weight: 927 lbs





