



SYNTHETICTURF WAREHOUSE



STW Pro Putt

USES


- ▶ Landscape
- ▶ Lawns
- ▶ Playgrounds
- ▶ Traffic Medians
- ▶ Pet Areas
- ▶ Commercial or Residential
- ▶ Light-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

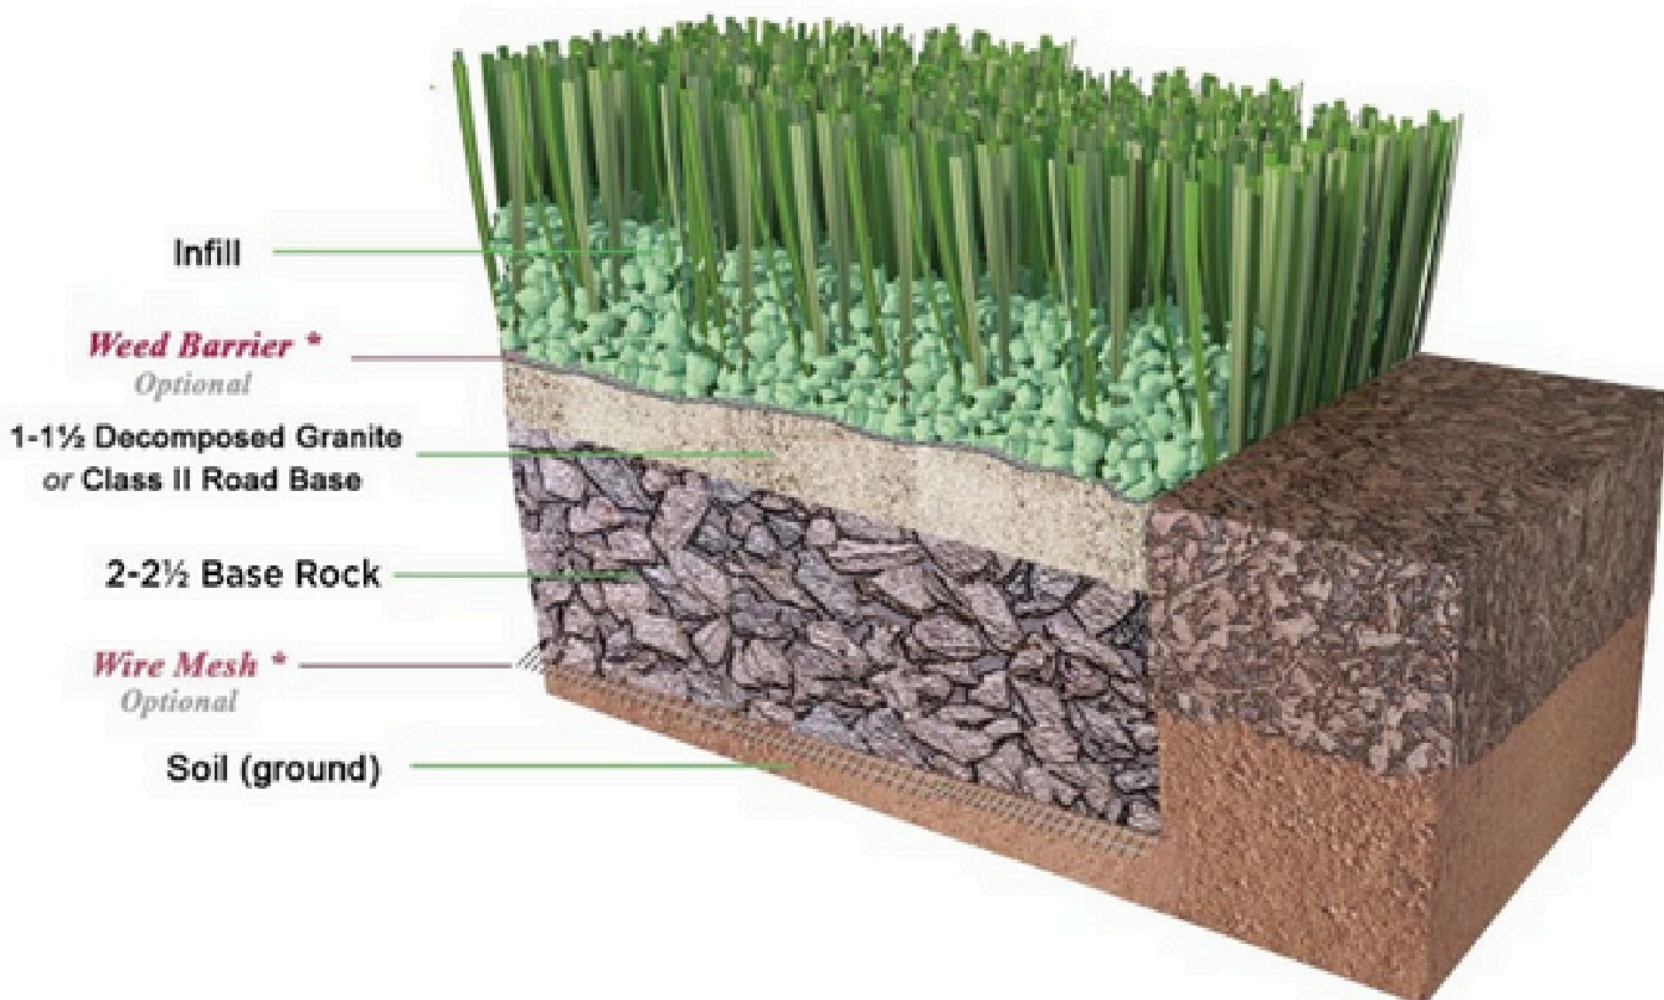

SPECIFICATIONS

Pile Height: 5/8"
Turf Gauge: 3/16
Face Weight: 44 oz./yd²
Backing Weight: 23 oz./yd²
Total Weight: 67 oz./yd²
Stitch Rate: 31/10cm
Stitches/M ² : 65100
Material/Dtex: PP5800
Color: Medium Bi-Color Green
Type Of Fiber: Polypropylene Monofilament
Infill Amount: 1.0 lb./psf.
Primary Backing: Premium GST Backing
Tuft Bind: 8+ lb/force (ASTM D1335)
Permeability: 71.0 inches/hr. (ASTM F1551)
Melting Point: 176 °F (ASTM D2859)
Grab Tear MD: >300 lb./force (ASTM D5034)
Grab Tear CMD: >200 lb./force (ASTM D5034)
Roll Width: 15 ft
Roll Length: 100 ft
Sq. Ft. Per Roll: 1500
Total Roll Weight: 686 lbs



Phone: 843-505-5694

www.synturfwarehouse.com | Email: office@synturfwarehouse.com